


EnergyPak 5-EP24200

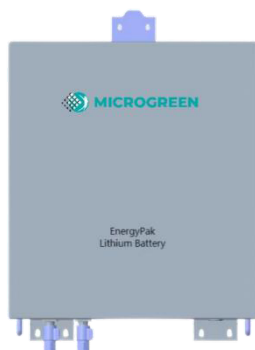

- **Compact size**
- **High efficiency**
- **Easy installation**
- **High energy density**
- **Excellent safety of CATL LifePO4 cells**

Datasheet		EnergyPak 5-EP24200
Battery Data		
Nominal Voltage		25.6V
Nominal Energy		5.1kWh
Discharge Voltage		23~28V
Charge Voltage		23~28V
Cont. Charge Current		100A
Max. Charge Current		200A
Cont. Discharge Current		200A
Cont. Discharge DC Power		5kW
Max. Discharge DC Power		5kW/ More than 2 units in parallel
Operating temperature		0°C ~ 45°C (Charge) -20°C ~ 55°C (Discharge)
General Data		
scalability		Up to 4 units
DOD		90%
Communication		CAN2.0 / RS485 / RS232
Cycle Life		>6000
IP Grade		IP21
Installation		Wall or Floor mount
Dimension		535×465× 205mm
Weight		55kg
Warranty		5 Years
UN38.3		

* When the temperature is below 0 °C or above 45°C, the performance will be limited.